

PEMSERTER[®] SERIES 4[®] PRESS

The PEMSERTER[®] Series 4[®] press is totally pneumatic providing 6 tons of force and has a 45.7 cm / 18" throat depth which provides clearance for a variety of chassis configurations. It is designed to install self-clinching fasteners in size M2 / #0 thru M10 / 3/8" in steel, and sizes up to M12 / 1/2" in aluminum panels or circuit boards.



Stroke Counter



Laser Pointer



**New
Standard
Features**



Lockable Tool/Accessories Storage Cabinet

Features and Benefits


- ▶ Insertion force adjustable from 4.5 to 53.4 kN / 1000 lbs. to 6 tons.
- ▶ Pneumatic power for speed, consistency, and simple operation. Requires shop air only.
- ▶ Integral point-of-operation safety.
- ▶ Large parts tray with dividers.
- ▶ Rapid tooling changeover, perfect for short production runs.
- ▶ Laser pointer, stroke counter, and lockable cabinet for tools and accessories storage.
- ▶ One-year parts warranty and two-year limited warranty on pneumatic components.

PEMSERTER® Series 4® Press

Specifications

Ram Force	4.5 to 53.4 kN / 1,000 to 12,000 lbs.
Pressure System Type	Pneumatic / Lever
Air Requirements*	6 to 7 BAR / 90 to 100 PSI 12 mm / 1/2" dia. minimum line flow
Throat Depth	45.7 cm / 18"
Height (on cabinet)	167.6 cm / 66"
Width (of press)	43.2 cm / 17"
Weight	Press - 259 kg / 570 lbs. With Cabinet - 372 kg / 819 lbs.
Cabinet Dimensions	740 mm L x 660 mm W x 760 mm H 29" L x 26" W x 30" H

*1 psi = 0.07 bar. 1 bar = 14.5 psi.

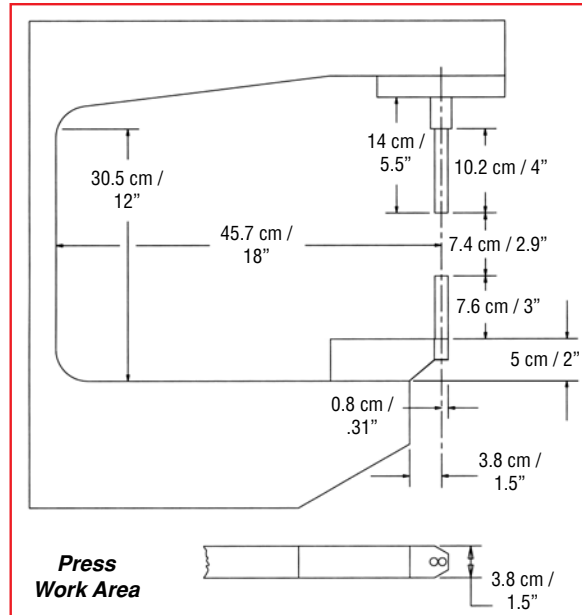

Optional Anvil Holders and Tooling


Optional anvil holders and tooling can be easily installed on all new and existing PEMSERTER® Series 4® presses.



Top Mount Reverse Flange Anvil Holder includes punch and anvil.



Bottom Mount Reverse Flange Anvil Holder.

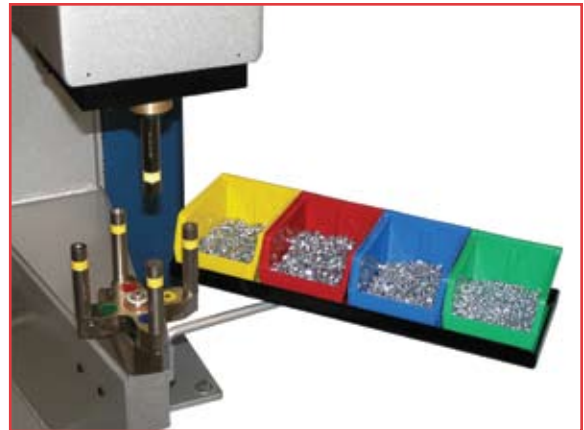

The PEMSERTER® QX4™ manual Turret Tool System provides an efficient method to quickly change between four different anvil tools. The one-handed operation of this tool allows an operator to install four different types and/or sizes of fasteners with one set-up. For more information see PEM Bulletin QX4 on our web site.

Specifications subject to change without notice.
Check our website for the most current version of this bulletin.

© 2009, PennEngineering

PennEngineering®



PS4L-2

North America: Danboro, PA 18916 USA • E-mail: pemsert@pemnet.com • Tel: +1-215-766-8853 • Fax: +1-215-766-3634 • 800-523-5321 (USA Only)
U.K. And Europe: Doncaster, England • E-mail: uk@pemnet.com Tel: +44 (0)1302 765700 • Fax: +44 (0)1302 367580
Asia/Pacific: Singapore • E-mail: singapore@pemnet.com • Tel: +65-6-745-0660 • Fax: +65-6-745-2400
Shanghai, China • E-mail: china@pemnet.com • Tel: +86-21-5868-3688 • Fax: +86-21-5868-3988

Visit our PEMNET™ Resource Center at www.pemnet.com